

# Food gas equipments



## Flex stainless steel

### Product description

Flexible High Pressure connection consisting of a parallel spiral metal hose made of AISI 316 stainless steel with a double AISI 304 stainless steel reinforcement braid and an anti-kink cable, used to connect tanks to manifolds. The incoming connection is specific to the gas used while the outlet connection W21.7X1/14 "A" has a conical sealing nut.

### Normatives

UNI EN ISO 9001:2008

### Components

- AISI 316 stainless steel parallel spiral flexible metal hose.
- Double AISI 304 stainless steel reinforcement braid.
- Reinforcement braid.
- O-ring seal according to gas type: SILICONE, NYLON, NBR. NBR.

### Product codes

LENGHT	INLET - OUTLET CONNECTION	CODE
1 m	W21,7x1/14" 'A' - G3/4" 'A' DIN with anti-kink cable	HSAL016D
1 m	W21,7x1/14" 'A' - SI22,91x1,814 'B' F with anti-kink cable	HSAL016F
1 m	W21,7x1/14" 'A' - G5/8" 'B' BS with anti-kink cable	HSAL016UK
1 m	W21,7x1/14" 'A' - W24,32x1/14" 'B' DIN with anti-kink cable	HSAL017D
1 m	W21,7x1/14" 'A' - SI21,7x1,814" 'A' F with anti-kink cable	HSAL017F
1 m	W21,7x1/14" 'A' - W21,80x1/14" 'A' DIN with anti-kink cable	HSAL018D
1 m	W21,7x1/14" 'A' - W0,860"x1/14" 'A' BS with anti-kink cable	HSAL019UK
2 m	W21,7x1/14" 'A' - G3/4" 'A' DIN with anti-kink cable	HSAL020D
2 m	W21,7x1/14" 'A' - SI22,91x1,814 'B' F with anti-kink cable	HSAL020F
2 m	W21,7x1/14" 'A' - G5/8" 'B' BS with anti-kink cable	HSAL020UK
2 m	W21,7x1/14" 'A' - W24,32x1/14" 'A' DIN with anti-kink cable	HSAL021D
2 m	W21,7x1/14" 'A' - SI21,7x1,814 'A' F with anti-kink cable	HSAL021F


## Product codes

LENGHT	INLET - OUTLET CONNECTION	CODE
2 m	W21,7x1/14" 'A' - W21,80x1/14 'A' DIN with anti-kink cable	HSAL022D
2 m	W21,7x1/14" 'A' - W0,860"x1/14" 'A' BS with anti-kink cable	HSAL023UK

## Technical data

CODE	INLET - OUTLET CONNECTION	LENGHT	Ø INSIDE	P max.	P blast	BENDING RADIUS	WEIGHT
HSAL016D	W21,7x1/14" 'A' - G3/4" 'A' DIN with anti-kink cable	1 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL016F	W21,7x1/14" 'A' - SI22,91x1,814 'B' F with anti-kink cable	1 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL016UK	W21,7x1/14" 'A' - G5/8" 'B' BS with anti-kink cable	1 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL017D	W21,7x1/14" 'A' - W24,32x1/14" 'B' DIN with anti-kink cable	1 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL017F	W21,7x1/14" 'A' - SI21,7x1,814" 'A' F with anti-kink cable	1 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL018D	W21,7x1/14" 'A' - W21,80x1/14 'A' DIN with anti-kink cable	1 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL019UK	W21,7x1/14" 'A' - W0,860"x1/14" 'A' BS with anti-kink cable	1 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL020D	W21,7x1/14" 'A' - G3/4" 'A' DIN with anti-kink cable	2 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL020F	W21,7x1/14" 'A' - SI22,91x1,814 'B' F with anti-kink cable	2 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL020UK	W21,7x1/14" 'A' - G5/8" 'B' BS with anti-kink cable	2 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL021D	W21,7x1/14" 'A' - W24,32x1/14" 'A' DIN with anti-kink cable	2 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL021F	W21,7x1/14" 'A' - SI21,7x1,814" 'A' F with anti-kink cable	2 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL022D	W21,7x1/14" 'A' - W21,80x1/14 'A' DIN with anti-kink cable	2 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg
HSAL023UK	W21,7x1/14" 'A' - W0,860"x1/14" 'A' BS with anti-kink cable	2 m	6,5 mm	365 bar	1100 bar	35 mm	1,3 kg

## Technical Images

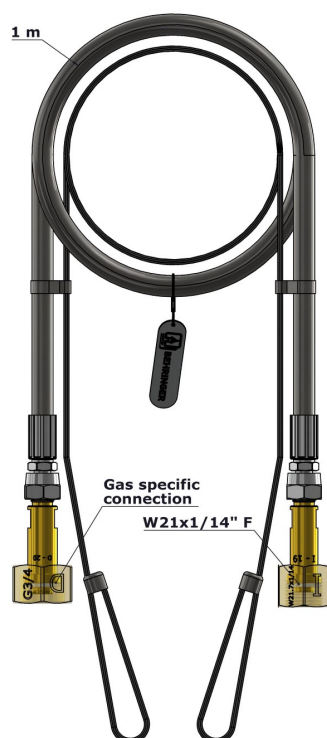

Behringer S.r.l. via Gualco 4, 16165 Genova ITALY

T +39 010 8309103

F +39 010 8309183

e-mail info@behringer.it

C.F. e P.I. 01167840998

