

# Marine and industrial plant engineering



## EURO/7 modular pressure regulator workstation

### Product description

Multi-supply-point station. Complete with EURO pressure regulator, pressure gauge and three or six 0-30 l/min flowmeters. G3/8" F R threaded ball valve on inlet. Ø 8 mm hose connector on outlet.

### Normatives

UNI EN ISO 2503:2015 | UNI EN ISO 5171:2010 | UNI EN ISO 9539:2014 | UNI EN ISO 9001:2008

### Components

- CW614N brass body and cap.
- No.1 inlet G3/8" F R ball valve with red lever.
- Ø 8 mm hose connector on outlet.
- No.1 outlet pressure gauge, with range according to model and Ø 63 mm, class 2.5.
- N.3 or 6 argon or CO2 0-30 L/min flowmeters.
- Stainless steel springs.
- Stainless steel containment structure.
- Screen printed aluminum cover.
- NBR membrane.
- NBR O-ring.
- EPDM seat.
- Nylon gaskets.


### Product codes

TYPE	GAS	CODE
3 flowmeters	ARGON - CARBON DIOXIDE	PL1055
6 flowmeters	ARGON - CARBON DIOXIDE	PL1056

## Technical data

CODE	P <sub>1</sub> max.	P <sub>2</sub> max.	INLET CONNECTION	OUTLET CONNECTION	PRESSURE GAUGE RANGE	TYPE	WEIGHT
PL1055	30 bar	4 bar	G3/8" F R	Ø 8 mm hose connector	0-6 bar	3 flowmeters	3,5 kg
PL1056	30 bar	4 bar	G3/8" F R	Ø 8 mm hose connector	0-6 bar	6 flowmeters	5,5 kg

## Technical Images

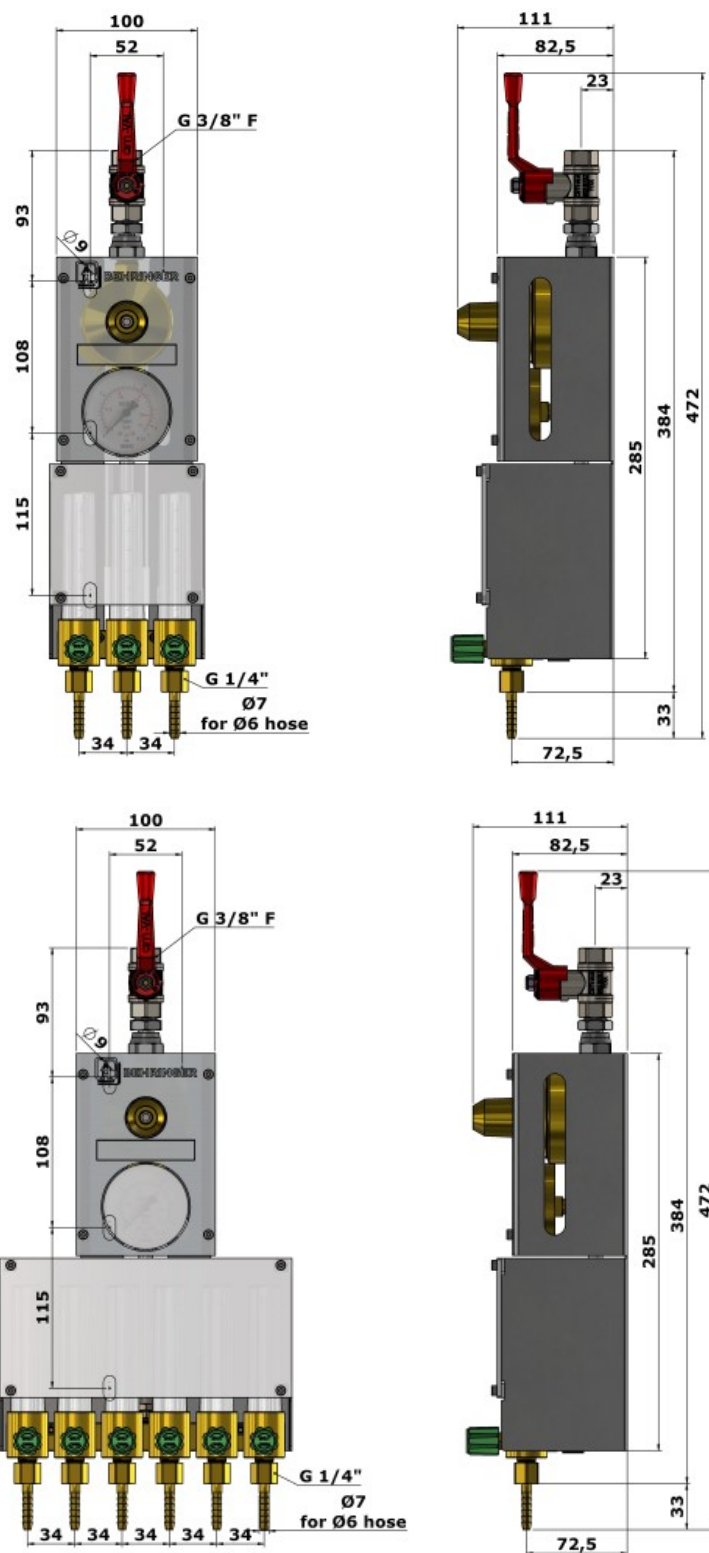

Behringer S.r.l. via Gualco 4, 16165 Genova ITALY

T +39 010 8309103

F +39 010 8309183

e-mail [info@behringer.it](mailto:info@behringer.it)

C.F. e P.I. 01167840998